




Performance Designs, Inc  
 1300 E Int'l Speedway Blvd  
 DeLand FL 32724  
 Telephone: 386-738-2224  
 Fax: 386-734-8297

**LINE TRIM CHART  
 FOR  
 PE LIGHTNING 176-253**

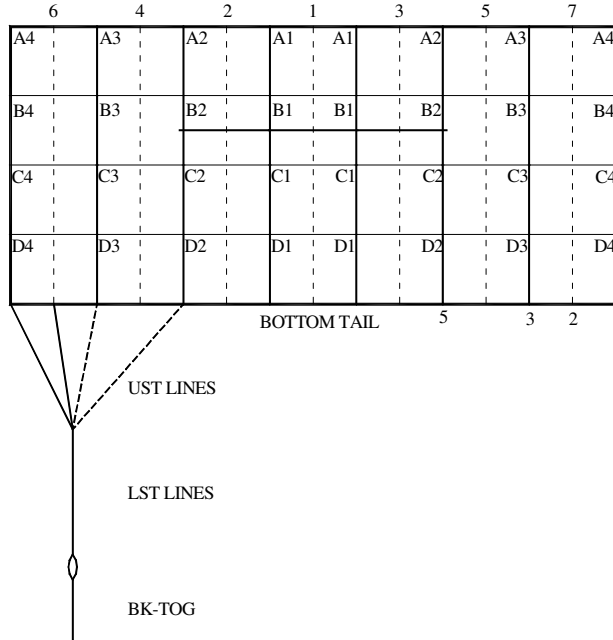

	<b>176</b>	<b>193</b>	<b>218</b>	<b>235</b>	<b>253</b>
CA1, CA4	124 1/4	130 1/8	138 1/4	143 1/2	149
CA-CB	2 1/2	2 3/4	3	3	3 1/8
CA-C	10 5/8	11 1/8	11 7/8	12 3/8	12 3/4
CA-D	20	20 7/8	22 1/4	23 1/8	23 7/8
A2, A3	124 3/4	130 5/8	138 7/8	144 1/8	149 1/2
A-B	3 1/8	3 1/4	3 1/2	3 5/8	3 3/4
A-C	10 1/8	10 5/8	11 1/4	11 3/4	12 1/8
A-D	19 1/2	20 3/8	21 5/8	22 1/2	23 3/8
CA4-UST	14 7/8	15 1/4	15 7/8	16 1/4	16 5/8
B STAB SLK	1/2	1/2	1/2	1/2	1/2
C STAB SLK	1	1	1	1	1
D STAB SLK	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
BRIDLE	79	82	93	93	102
BK-TOG*	23	24	25 1/2	26 1/2	27 1/2
Standard Slider	23" Chord 31" Span	23" Chord 31" Span	23" Chord 31" Span	23" Chord 31" Span	23" Chord 31" Span

\*Due to development methodology, the finished BK-TOG dimensions may not scale  
 Measurements in Inches