




Performance Designs, Inc
 1300 E Int'l Speedway Blvd
 DeLand FL 32724
 Telephone: 386-738-2224
 Fax: 386-734-8297

**LINE TRIM CHART
 FOR
 PC LIGHTNING 160-253**

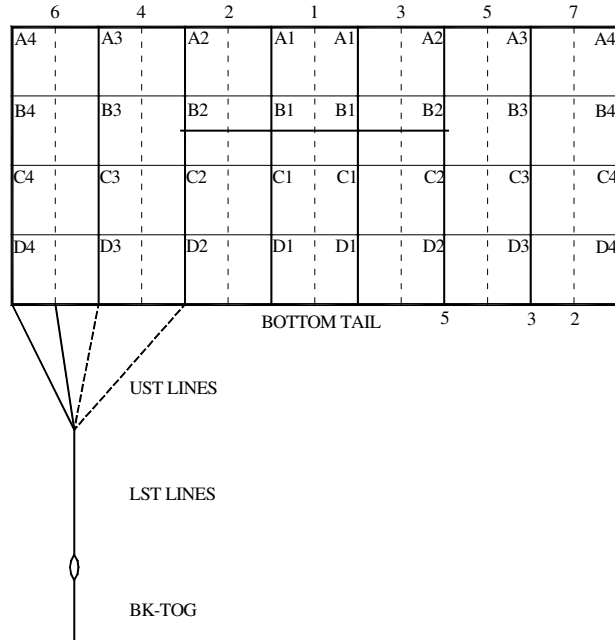

| | 160 | 176 | 193 | 218 | 235 | 253 |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| CA1, CA4 | 116 5/8 | 124 1/4 | 130 1/8 | 138 1/4 | 143 1/2 | 149 |
| CA-CB | 2 1/8 | 2 1/2 | 2 3/4 | 3 | 3 | 3 1/8 |
| CA-C | 11 5/8 | 10 5/8 | 11 1/8 | 11 7/8 | 12 3/8 | 12 3/4 |
| CA-D | 21 1/4 | 20 | 20 7/8 | 22 1/4 | 23 1/8 | 23 7/8 |
| A2, A3 | 117 1/4 | 124 3/4 | 130 5/8 | 138 7/8 | 144 1/8 | 149 1/2 |
| A-B | 3 1/8 | 3 1/8 | 3 1/4 | 3 1/2 | 3 5/8 | 3 3/4 |
| A-C | 10 7/8 | 10 1/8 | 10 5/8 | 11 1/4 | 11 3/4 | 12 1/8 |
| A-D | 20 1/2 | 19 1/2 | 20 3/8 | 21 5/8 | 22 1/2 | 23 3/8 |
| CA4-UST | 16 1/4 | 14 7/8 | 15 1/4 | 15 7/8 | 16 1/4 | 16 5/8 |
| B STAB SLK | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 |
| C STAB SLK | 1 | 1 | 1 | 1 | 1 | 1 |
| D STAB SLK | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 |
| BRIDLE | 79 | 79 | 82 | 93 | 93 | 102 |
| BK-TOG* | 19 1/2 | 23 | 24 | 25 1/2 | 26 1/2 | 27 1/2 |
| Standard Slider | 23" Chord 31" Span | 23" Chord 31" Span | 23" Chord 31" Span | 23" Chord 31" Span | 23" Chord 31" Span | 23" Chord 31" Span |

*Due to development methodology, the finished BK-TOG dimensions may not scale
 Measurements in Inches